

# INTUITIVE AND INTELLIGENT ENGRAVING





# Intuitive and Intelligent Engraving

More than 30 years of engraving expertise in one device

The DGSHAPE DE-3 builds on over 3 decades of Roland engraving innovation to deliver impressive versatility and fast, user-friendly automated production. Featuring laser-pointing technology, ethernet connectivity, automatic depth regulation and a host of intelligent enhancements, the DE-3 offers simple set-up and operation to precisely engrave a huge range of delicate and durable materials such as brass, aluminium, copper, engraving laminates and plastics, wood items and more. Compact yet powerful, the DE-3 is the ideal engraving solution for use within office, classroom, workshop and retail environments.

## DE-3

DESKTOP ENGRAVER

Open Architecture and  
Intelligent New Software

For optimum choice and versatility, the DE-3 works out-of-the box with popular engraving software, industry-standard tools and materials. Dr. Engrave Plus, included with the DE-3, offers exciting user benefits to maximise the ease and speed of production.




**Quick and Simple Production**  
Powered by a 20,000 rpm DC brushless motor for impressively fast production, the DE-3 harnesses advanced surface detection and other automatic features to make set-up and engraving quick and simple.

**Accurate Personalisation at Your Fingertips**  
A laser pointer accurately defines the origin point and displays an engraving path preview on the material. Set the engraving position at the touch of a button for high-precision production, every time.

**Precise Engraving**  
Easy-to-apply nose cones can be added to the user-replaceable spindle unit to automatically regulate engraving depth on the material surface, delivering consistent high-quality results.

**Ethernet Connectivity for Flexible Production**  
With remote machine management capabilities, the DE-3 offers USB and LAN connectivity for multiple machine engraving. Power up your production with the DE-3.



**Ai.**

SUPPORTS  
AI FILES AND  
STANDARD  
GRAPHIC/  
VECTOR DATA.



IMPORT EXCEL AND  
CSV DATABASES  
FOR FAST  
ENGRAVING  
OF SERIAL DATA  
JOBS.




ENABLES  
STANDARD  
ENGRAVING AS  
WELL AS SURFACE  
LEVELLING AND  
HOLE DRILLING.

Model shown with  
optional centre vice

## Discover a World of Applications with DGSHAPE Engraving

Whether you are an entrepreneurial print service provider looking to expand your portfolio, a manufacturer who wants to produce durable labels and signage in-house, or an awards and gifts supplier looking for a versatile personalisation solution to add value to your product line, the intuitive and intelligent DE-3 desktop engraver is the ideal turnkey solution for engraving precise text and graphics onto an impressive range of materials and objects. Offering a fully enclosed engraving area for safe and clean operation, with the DE-3 you can create custom signs, directional signage and nameplates for indoor and outdoor display. Personalise gifts, awards, promotional items and mementos to transform them into treasured high-value products. Produce highly durable industrial labels and benefit from variable data engraving functionality for a range of product marking applications.

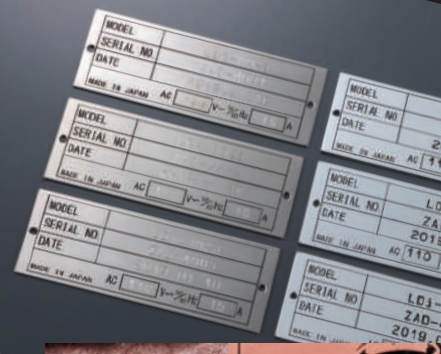

**Hand-Held Control**  
Without the need for a computer, users can store data and perform machine operations.





# DE-3

## DGSHAPE ENGRAVER

### Specifications

Work table size	305 mm x 230 mm
Maximum work area (Work Envelope)	X, Y, Z: 305 mm x 230 mm x 40 mm
XYZ axis drive system	Stepper motor, 3-axis simultaneous control
Operating speed	XY axis 0.1 - 60 mm/sec. Z axis 0.1 - 30 mm/sec.
Software resolution	0.01 mm/step
Mechanical resolution	XYZ axis 0.00125 mm/step
Spindle Motor	Brushless DC Motor
Spindle Speed	5000 - 20000 rpm
Tool loading	Cutter Holder, Collet Type
Maximum material thickness	40 mm (38 mm when using the nose cone)
Connection	USB or Ethernet (10 BASE-T/ 100 BASE-TX)
Machine language	RML-1
Power supply	Voltage and frequency AC 100 to 240V ±10%, 50/60 Hz (overvoltage category: II, IEC 60664-1) Rated current 1.0 A
Power consumption	80 W
Operating noise	During operation 63 dB (or less) During standby 40 dB (or less)
External dimensions	616 mm x 587 mm x 390 mm
Machine weight	35 kg
Installation environment	Indoor use, altitude: 2000 m or less, Temperature 5 to 40 °C, humidity 35 to 80% (no condensation), Environment pollution degree 2
Included items	DGSHAPE software package CD, Power cable, Power adapter, USB cable, Nose cone unit (resin / metal components), Nose unit set screw (fixing screw, spring), Spare set screw (for cutter holder), Solid collet (ø 3.175 mm), Spanner wrench, Hex wrench, Hex driver, Adhesive sheet, Dust collector adapter, Setup Guide

Specifications, designs and dimensions listed may be subject to change without notice.

### Accessories - Cutters

Item	Model	Description
Engraving cutters (for plastic)	ZEC-A2013	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.127 mm (W)
	ZEC-A2025	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.254 mm (W)
	ZEC-A2051	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.508 mm (W)
	ZEC-A2076	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.762 mm (W)
	ZEC-A4013	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.127 mm (W)
	ZEC-A4025	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.254 mm (W)
	ZEC-A4051	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.508 mm (W)
	ZEC-A4076	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.762 mm (W)
	ZEC-A2013-BAL	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.13 mm (W)
	ZEC-A2025-BAL	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.25 mm (W)
Engraving cutters (for aluminum or brass)	ZEC-A4013-BAL	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.13 mm (W)
	ZEC-A4025-BAL	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.25 mm (W)
	ZEC-A2150	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 1.52 mm (W)
	ZEC-A2190	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 1.91 mm (W)
	ZEC-A2230	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 2.29 mm (W)
	ZEC-A2320	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 3.175 mm (W)
	ZEC-A4150	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 1.52 mm (W)
	ZEC-A4190	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 1.91 mm (W)
	ZEC-A4230	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 2.29 mm (W)
	ZEC-A4320	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 3.175 mm (W)
Parallel engraving cutters (for plastic)	ZEC-A4380	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 3.81 mm (W)
	ZEC-A4430	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 4.34 mm (W)
	ZEC-A2013-QR	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.13 mm (W)
	ZEC-A2025-QR	Cemented carbide dia. = 3.175 mm x 114 mm (L) x 0.25 mm (W)
	ZEC-A4013-QR	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.13 mm (W)
	ZEC-A4025-QR	Cemented carbide dia. = 4.36 mm x 165 mm (L) x 0.25 mm (W)
	ZDC-A2000	Diamond dia. = 3.175 mm x 127 mm (L)
	ZDC-A4000	Diamond dia. = 4.36 mm x 178 mm (L)

dia. = shank diameter, L = overall length, W = blade width, unit = mm  
All 4.36 diameter tools require ZC-E436 Collet

### Other Accessories and Consumables

Item	Model	Description
Collets for end-mill	ZC-23	Diameter 6 mm, 5 mm, 4 mm, and 3 mm collets: 1 pc. each
	ZC-23-3	Diameter 3 mm collet: 1 pc.
	ZC-23-4	Diameter 4 mm collet: 1 pc.
	ZC-23-6	Diameter 6 mm collet: 1 pc.
	ZC-23-3175	Diameter 3.175 mm collet: 1 pc.
	ZC-23-6.35	Diameter 6.35 mm collet: 1 pc.
Collet for 4.36 diameter cutters	ZC-E436	Diameter 4.36 mm collet: 1 pc.
Nose cone	ZDN-200 (Metal)	Inner diameter 2 mm, outer diameter 4.2 mm, for engraving text
	DN-500R (Plastic)	Inner diameter 5 mm, outer diameter 8 mm, for engraving text
Spindle unit	ZS-35S	Replacement spindle unit
Adhesive sheet for securing material	AS-10	210 mm x 140 mm, 10 sheets
Centre vice	ZV-23CS	Loadable material using jig for nameplate: 152 mm (X) x 148 mm (Y), and 35 mm (H)
		Loadable material using jig for either pen or tube: 90 mm (X) x 146 mm (Y), and max. 20 mm thick
T-slot table	ZTT-35	Table size: 292 mm (X) x 220 mm (Y) Dimensions: 355 mm (W) x 230 mm (D) x 40 mm (H)

### Roland Care Warranty



Enjoy the peace of mind of having one of the most comprehensive warranty packages in the industry, included with the DE-3.

### DGSHAPE Corporation

At the forefront of advanced machine manufacturing for more than 35 years, Roland provides practical and reliable technology with unmatched service and support. DGSHAPE further builds on this reliability promise by improving user experience with fast and effortless engraving machines, designed for those just starting out and for engraving experts looking for a more intuitive solution.

DGSHAPE reserves the right to make changes in specifications, materials or accessories without notice. Actual device output may vary. For optimum output quality, periodic maintenance to critical components may be required. Please contact your DGSHAPE dealer for details. No guarantee or warranty is implied other than that expressly stated. DGSHAPE shall not be liable for any incidental or consequential damages, whether foreseeable or not, caused by defects in such products. All trademarks are the property of their respective owners. Three-dimensional data files may be protected under copyright. Reproduction or use of copyrighted material is governed by local, national, and international laws. Customers are responsible for observing all applicable laws and are liable for any infringement. DGSHAPE Corporation has licensed the MMP technology from the TPL Group.

